


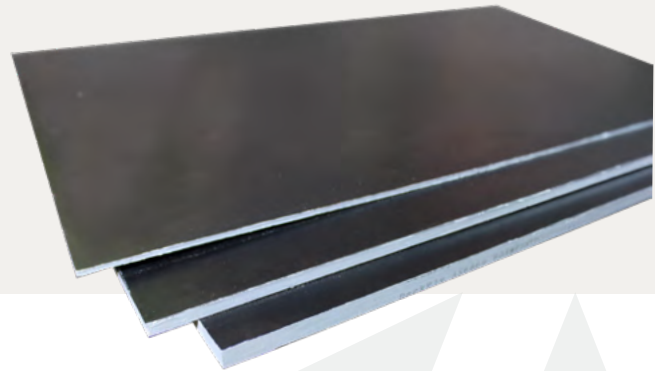

**DECKPLY**  
**BENDY RANGE**

Our Deckply Bendy Range is purpose-built for curved and radius formwork applications. Manufactured to Australian Formwork Plywood Standard AS 6669 and compliant with AS/NZS 2269 – Structural Plywood, it delivers reliable strength, flexibility and performance on site.

With Overlay on both sides, our Deckply Bendy Range is available in a standard 2400×1200 sheet size in 4, 9 and 12mm thicknesses.


**APPLICATIONS**

- > **4mm** – Ideal for curved formwork, protection of Class 2 formwork and floor protection.
- > **9mm** – Primarily used for curved formwork and skinning systems.
- > **12mm** – Suitable for curved formwork, hoardings and general-purpose applications.

Sheet Size	Thickness	Pieces Per Pack
2400 × 1200mm	4mm	225 piece
2400 × 1200mm	9mm	100 piece
2400 × 1200mm	12mm	75 piece